

RELEASE OF LIEN

THIS RELEASE OF LIEN (this "**Release**") is entered into as of the 31st day of October, 2015, by INA Group, LLC.

RECITALS:

A. Certain fire and library dues (the "**Dues**") in the amount of \$22,883.30 were owed to INA Group, LLC ("**INA Group**") with respect to the property (the "**Property**") described on Exhibit A attached hereto.

B. The Dues were paid in full by payment to INA Group on October 15, 2015.

C. INA Group desires to release all liens, claims, and encumbrances that it has against the Property.

NOW, THEREFORE, in consideration of the foregoing Recitals, receipt of payment in full for the Dues, and other good and valuable consideration, the receipt and sufficiency of which are hereby acknowledged, INA Group hereby agree as follows:

1. The recitals set forth above are true and correct.

2. INA Group hereby confirms receipt of payment as satisfaction in full of the amounts owed for the Dues.

3. INA Group hereby waives and releases any and all liens, claims, and rights of liens on the Property.

IN WITNESS WHEREOF, INA Group has caused this Release of Lien to be executed as of the date first set forth above.

INA Group:

INA Group, LLC,

By: [Signature]
Name: CLARK FOSLER
Its: MANAGER/MEMBER


STATE OF Nebraska)
) :ss
Lancaster COUNTY)

I, STACY A. JOHNSON, a Notary Public in and for said County in said State, hereby certify that Clark Fosler, whose name as manager/member of **INA Group, LLC**, a _____ limited liability company, is signed to the foregoing instrument, and who is known to me, acknowledged before me on this day that, being informed of the contents of the instrument, he / she, as such _____ and with full authority, executed the same voluntarily for and as the act of said limited liability company.

Given under my hand and seal, this 23rd day of October, 2015.

[Signature]
NOTARY PUBLIC

[SEAL]

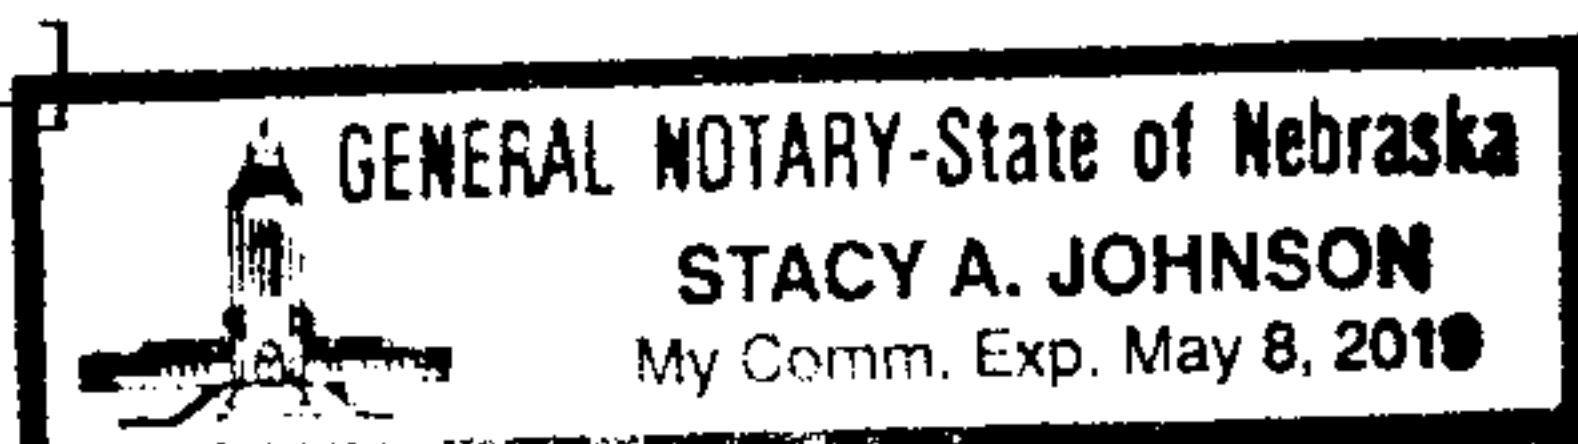

My Commission Expires: 5-8-19
Exhibit A

Property Description

See attached.



20151221000433240 2/14 \$53.00
Shelby Cnty Judge of Probate, AL
12/21/2015 08:40:03 AM FILED/CERT

EXHIBIT "A" - LEGAL DESCRIPTION

20151221000433240 3/14 \$53.00
Shelby Cnty Judge of Probate, AL
12/21/2015 08:40:03 AM FILED/CERT

Parcel I

Part of Section 9, Township 19 South, Range 2 West, Shelby County, Alabama, more particularly described as follows:

Beginning at an existing iron rebar being the most northerly corner of Lot 22, Heatherwood, 3rd Sector as recorded in the Probate Office of Shelby County, Alabama, in Map Book 8, page 29, run in a southwesterly direction along the west line of Lots 22 and 23 of said subdivision for a distance of 377.71 feet to an existing iron rebar being the most northerly corner of Lot 24 of said Heatherwood, 3rd Sector; thence turn an angle to the left of 16°26'35" and run in a southerly direction along the west line of Lots 24 and 25 of said Heatherwood 3rd Sector a distance of 339.10 feet to an existing iron rebar; thence turn an angle to the left of 16°40'13" and run in a southerly direction along the west line of Lots 26 and 27 of said Heatherwood 3rd Sector for a distance of 326.98 feet to an existing iron rebar being the northwest corner of Lot 28 of said Heatherwood 3rd Sector; thence turn an angle to the right of 0°01'51" and run in a southerly direction along the west line of said Lot 28 for a distance of 144.53 feet to an existing iron rebar being the most southwest corner of said Lot 28; thence turn an angle to the left of 88°25'16" and run in an easterly direction along the south line of said Lot 28 for a distance of 168.63 feet to an existing iron rebar being the southwest corner of said Lot 28 and being on the west right of way line of St. Anne's Drive; thence turn an angle to the right of 72°01'49" and run in a southeasterly direction along the southwest right of way line of St. Anne's Drive for a distance of 31.48 feet to an existing iron rebar being the northeast corner of Lot 29 of said Heatherwood 3rd Sector; thence turn an angle to the right of 107°55'40" and run in a westerly direction for a distance of 178.33 feet to an existing crimp iron pin being the northwest corner of said Lot 29; thence turn an angle to the left of 90° and run in a southerly direction along the west line of said Lot 29 and its southerly extension thereof for a distance of 360.71 feet to an existing iron rebar set by Laurence D. Weygand; thence turn an angle to the right of 90°22'56" and run in a westerly direction for a distance of 89.64 feet to an existing iron pin set by Laurence D. Weygand and being the southeast corner of Lot 60, Heatherwood 4th Sector 1st Addition as recorded in the Probate Office of Shelby County, Alabama in Map Book 11, page 33; thence turn an angle to the right of 89°49'23" and run in a northerly direction along the east line of Lots 60 and 61 of said Heatherwood 4th Sector, 1st Addition for a distance of 282.80 feet to an existing iron rebar set by Laurence D. Weygand; thence turn an angle to the left of 76°58'48" and run in a northwesterly direction along the north line of said Lot 61 for a distance of 184.92 feet to an existing iron rebar; thence turn an angle to the right of 0°07'59" and run in a northwesterly direction along the north line of Lot 62 of said Heatherwood 4th Sector 1st Addition for a distance of 36.61 feet to an existing iron rebar; thence turn an angle to the right of 31°54'01" and run in a northwesterly direction along the northeast line of said Lot 62 for a distance of 118.09 feet to an existing iron rebar; thence turn an angle to the right of 74°01'03" and run in a northeasterly direction for a distance of 157.60 feet and being a corner of Lot 63 of Heatherwood 4th Sector 1st Addition; thence turn an angle to the left of 15°55'13" and run in a northerly direction along the east line of Lot 63 for a distance of 70.44 feet; thence turn an angle to the left of 54°04'50" and run in a northwesterly direction along the northeast line of Lot 63 for a distance of 42.0 feet; thence turn an angle to the left of 19°58'17" and run in a northwesterly direction along the northeasterly line of Lot 63 for a distance of 70.85 feet to a common corner with Lot 64 of said Heatherwood 4th Sector 1st Addition; thence turn an angle to the right of 113°45'35" and run in a northeasterly direction for a distance of 90.43 feet to a corner on Lot 64 of said Heatherwood 4th Sector 1st Addition; thence turn an angle to the left of 57°31'33" and run in a northerly direction along the east line of said Lot 64 for a distance of 48.72 feet; thence turn an angle to the left of 5°46'25" and run in a northerly direction along the east line of said Lot 64 for a distance of 66.15 feet; thence turn an angle to the left of 57°53'28" and run in a northwesterly direction along the north line of said Lot 64 for a distance of 52.28 feet; thence turn an angle to the left of 23°43'55" and run in a westerly direction along the north line of said Lot 64 for a distance of 48.70 feet to the most easterly corner of Lot 65 of said Heatherwood 4th Sector 1st Addition; thence turn an angle to the right of 19°29'41" and run in a northwesterly direction for a distance of 100.48 feet to a corner of Lot 65 of said Heatherwood 4th Sector 1st Addition; thence turn an angle to the left of 10°02'11" and run in a westerly direction along the north line of said Lot 65 for a distance of 61.57 feet; thence turn an angle to the left of 3°54'42" and run in a westerly direction along

Continued on the following page



the north line of said Lot 65 for a distance of 61.57 feet; thence turn an angle to the left of $3^{\circ}54'42''$ and run in a westerly direction along the north line of said Lot 65 and Lot 66 of said Heatherwood 4th Sector 1st Addition for a distance of 123.04 feet; thence turn an angle to the left of $8^{\circ}10'53''$ and run in a westerly direction along the north line of said Lot 66 for a distance of 234.0 feet to an existing iron rebar set by Laurence D. Weygand; thence turn an angle to the right of $129^{\circ}01'51''$ and run in a northeasterly direction for a distance of 100.0 feet to an existing iron rebar set by Laurence D. Weygand and the point of beginning of a curve, said curve being concave in a southeasterly direction and having a central angle of $22^{\circ}30'$ and a radius of 321.75 feet; thence turn an angle to the right and run in a northeasterly direction along the arc of said curve for a distance of 126.35 feet to an existing iron rebar set by Laurence D. Weygand; thence turn an angle to the right (90° from the tangent) and run in a southeasterly direction for a distance of 60.0 feet; thence turn an angle to the left of $75^{\circ}30'$ and run in a northeasterly direction for a distance of 93.0 feet to an existing iron rebar set by Laurence D. Weygand; thence turn an angle to the left of $14^{\circ}0'$ and run in a northeasterly direction for a distance of 100.0 feet to an existing iron rebar set by Laurence D. Weygand; then turn an angle to the left of $7^{\circ}0'$ and run in a northeasterly direction for a distance of 93.0 feet to an existing iron rebar set by Laurence D. Weygand; thence turn an angle to the left of $83^{\circ}0'$ and run in a northwesterly direction for a distance of 123.0 feet to an existing iron rebar set by Laurence D. Weygand; thence turn an angle to the right of $11^{\circ}0'$ and run in a northwesterly for a distance of 207.0 feet to an existing iron rebar set by Laurence D. Weygand; thence turn an angle to the left of $112^{\circ}30'$ and run in a southwesterly direction for a distance of 227.0 feet to an existing iron rebar set by Laurence D. Weygand; thence turn an angle to the right of $18^{\circ}30'$ and run in a southwesterly direction for a distance of 227.0 feet to an existing iron rebar set by Laurence D. Weygand; thence turn an angle to the left of $104^{\circ}30'$ and run in a southeasterly direction for a distance of 118.0 feet to an existing iron rebar set by Laurence D. Weygand; thence turn an angle to the left of $28^{\circ}45'02''$ and run in a southeasterly direction for a distance of 81.70 feet to an existing iron rebar set by Laurence D. Weygand and being on a curve, said curve being concave in a southeasterly direction and having a central angle of $13^{\circ}18'23''$ and a radius of 381.75 feet; thence turn an angle to the right ($109^{\circ}54'14''$ to the chord of said curve and run in a southwesterly direction along the arc of said curve for a distance of 88.66 feet to an existing iron rebar set by Laurence D. Weygand and being the point of ending of said curve; thence run in a southwesterly direction along a line tangent to the end of said curve for a distance of 100.0 feet to an existing iron rebar set by Laurence D. Weygand; thence turn an angle to the right of 90° and run in a northwesterly direction for a distance of 57.26 feet to an existing iron rebar set by Laurence D. Weygand and being a corner of Lot 70, Heatherwood 4th Sector 1st Addition; thence turn an angle to the left of $47^{\circ}05'24''$ and run in a southwesterly direction for a distance of 146.99 feet to an existing iron rebar set by Laurence D. Weygand; thence turn an angle to the left of $40^{\circ}48'20''$ and run in a southwesterly direction for a distance of 41.72 feet to an existing iron rebar being a corner of Lot 71-A, Resurvey of Lot 71, Heatherwood 4th Sector 1st Addition as recorded in the Probate Office of Shelby County, Alabama in Map Book 24, page 31; thence turn an angle to the right of $106^{\circ}43'37''$ and run in a northwesterly direction along the northeast line of said Lot 71-A for a distance of 87.12 feet to an existing iron rebar; thence turn an angle to the left of $45^{\circ}29'20''$ and run in a northwesterly direction along the north line of Lot 71-A for a distance of 107.95 feet to an existing iron rebar; thence turn an angle to the left of $35^{\circ}26'45''$ and run in an southwesterly direction along the northwest line of said Lot 71-A for a distance of 69.34 feet to an existing iron rebar; thence turn an angle to the left of $35^{\circ}11'51''$ and run in a southwesterly direction for a distance of 130.86 feet to an existing iron rebar being on the northeast right of way line of Masters Lane; thence turn an angle to the right of $110^{\circ}05'29''$ and run in a northwesterly direction along the northeast right of way line of Masters Lane for a distance of 134.78 feet to the point of beginning of a curve; said curve being concave in an easterly direction and having a central angle of $29^{\circ}08'07''$ and a radius of 180.26; thence turn an angle to the right of and run in a northwesterly and northerly direction along the arc of said curve and along the northeast right of way line of Masters Lane for a distance of 91.66 feet to an existing iron rebar set by Laurence D. Weygand and being the southwest corner of Lot 1-A, A resurvey of Heatherwood 4th Sector 3rd Addition as recorded in the Probate Office of Shelby County, Alabama in Map Book 20, page 103; thence turn an angle to the right and run in a northeasterly direction along the southeast line of said Lot 1-A for a distance of 232.33 feet to an existing iron rebar set by Laurence D. Weygand and being the most easterly corner of said Lot 1-A; then turn an angle to the left of $80^{\circ}59'36''$ and run in a northwesterly direction along the northeast line of said Lot 1-A for a distance of 136.98 feet to an existing iron rebar being the most northerly corner of said Lot 1-A and being on the southeast right of way line of Heatherwood Drive; thence turn an angle to the right of $79^{\circ}17'47''$ and run in a northeasterly direction along the southeast right of way line of Heatherwood Drive for a distance of 31.51 feet to the point of beginning of a curve, said curve being concave in a northwesterly direction and having a central angle of $57^{\circ}14'30''$ and a radius of 310.16 feet; thence turn an angle to the left and run in a northeasterly direction along arc of said curve along the southeast right of way line of Heatherwood Drive for a distance of 309.87 feet to the point of ending of said curve; thence run in a Northerly direction along a line tangent to the end of said curve and along the east right of way line of Heatherwood Drive for a distance of 150.48 feet to the point of beginning of a new curve; said newest curve being concave in a southeasterly direction and having a central angle of $47^{\circ}33'28''$ and a radius of 202.97 feet; thence turn an angle to the right and run in a northerly and northeasterly direction along the arc of said curve and along the southeast right of way line of Heatherwood Drive for a distance of 168.47 feet to a point

of compound curve; said newest curve being concave in a southeasterly direction and having a central angle of 17°23'17" and a radius of 623.96 feet; thence turn an angle to the right and run in a northeasterly direction along the arc of said curve and along the southeast right of way line of Heatherwood Drive for a distance of 189.36 feet to the point of ending of said curve; thence run in a northeasterly direction along a line tangent to the end of said curve and along the southeast right of way line of Heatherwood Drive for a distance of 125.0 feet to the point of beginning of a new curve, said newest curve being concave in a southeasterly direction and having a central angle of 26°49'49" and a radius of 254.85 feet; thence turn an angle to the right and run in a northeasterly direction along the southeast right of way line of Heatherwood Drive for a distance of 119.34 feet to a point of reverse curve; said newest curve being concave in a northwesterly direction and having a central angle of 23°56'02" and a radius of 162.19 feet; thence turn an angle to the left and run in a northeasterly direction along the arc of said curve and along the southeast right of way line of Heatherwood Drive for a distance of 67.75 feet; thence turn an angle to the right (90° from the tangent) and run in a southeasterly direction for a distance of 10.0 feet to a point on a curve, said curve being concave in a northwesterly direction and having a central angle of 7°34'25" and a radius of 378.25 feet; thence turn an angle to the left and run in a northeasterly direction along the southeast right of way line of Heatherwood Drive for a distance of 50.0 feet to a point of reverse curve, said newest curve being concave in a southerly direction and having a central angle of 75°18'09" and a radius of 75.0 feet; thence turn an angle to the right and run in a northeasterly, easterly and southeasterly direction along the arc of said curve for a distance of 91.63 feet to a point on the south right of way line of St. Anne's Drive; thence run in a southeasterly direction along the south right of way line of St. Anne's Drive and along a line tangent to the end of said curve for a distance of 22.44 feet to the point of beginning of a new curve; said latest curve being concave in a northerly direction having a central angle of 25°23'25" and a radius of 602.34 feet; thence turn an angle to the left and run in an easterly direction along the arc of said curve for a distance of 266.92 feet to the point of ending of said curve; thence run in an easterly direction along the south right of way line of St. Anne's Drive and along a line tangent to the end of said curve for a distance of 99.07 feet to the northwest corner of Lot 19 Heatherwood 2nd Sector as recorded in the Probate Office of Shelby County, Alabama, in Map Book 8, page 28 ; thence turn an angle to the right of 90° and run in a southerly direction along the west line of Lots 19, 18 and 17 of said Heatherwood 2nd Sector for a distance of 434.35 feet; thence turn an angle to the left of 28°06' and run in a southeasterly direction along the southwest line of said Lot 17 for a distance of 83.26 feet; thence turn an angle to the left of 4°09' and run in a southeasterly direction along the southwest line of Lot 16 of said Heatherwood 2nd Sector for a distance of 53.30 feet; thence turn an angle to the left of 15°05'30" and run in a southeasterly direction along the southwest line of said Lot 16 for a distance of 99.33 feet; thence turn an angle to the left of 25°13' and run in an easterly direction along the south line of Lot 16 for a distance of 34.62 feet; thence turn an angle to the left of 55°58' and run in a northeasterly direction along the southeast line of said Lot 16 for a distance of 64.66 feet; thence turn an angle to the left of 10 21' and run in a northeasterly direction for a distance of 78.55 feet to the most southerly corner of said Lot 15 of said Heatherwood 2nd Sector; thence turn an angle to the right of 1°33'30" and run in a northeasterly direction along the southeast line of said Lot 15 for a distance of 136.63 feet; thence turn an angle to the right of 11°19'45" and run in a northeasterly direction along the southeast line of said Lot 15 for a distance of 58.45 feet; thence turn an angle to the left of 18°28'15" and run in a northeasterly direction along the east line of said Lot 15 for a distance of 59.84 feet to an existing iron rebar being the southeast corner of Lot 14 of said Heatherwood 2nd Sector; thence turn an angle to the left of 6°25'29" and run in a northeasterly direction along the southeast line of Lots 14 and 12 of said Heatherwood 2nd Sector for a distance of 315.64 feet to an existing iron rebar being the southwest right of way line of St. Anne's Drive; thence turn an angle to the right of 101°35'27" and run in a southeasterly direction along the southwest right of way line of St. Anne's Drive for a distance of 107.23 feet to an existing iron rebar being the point of beginning.

LESS AND EXCEPT any part of the above described property constituting any part of Lot 71-B, according to a Resurvey of Lot 71-A of a resurvey of Lot 71, Heatherwood, 4th Sector, 1st Addition as recorded in Map Book 27, page 115 in the Probate Office of Shelby County, Alabama.

Parcel II:

Part of the South 1/2 of Section 9, Township 19 South Range 2 West, Shelby County, Alabama, being more particularly described as follows:

Beginning at an existing iron rebar being the most westerly corner of Lot 24, Heatherwood Fourth Sector as recorded in the Probate Office of Shelby County, Alabama in Map Book 9, pages 161 through 163, run in a southeasterly direction along the southwest line of said Lot 24 for a distance of 167.74 feet to an existing iron rebar; thence turn an angle to the left of 58°03'05" and run in a northeasterly direction along the southeast line of said Lot 24 for a distance of 104.41 feet to an existing iron rebar being the most southerly corner of Lot 25 of said Heatherwood Fourth Sector; thence turn an angle to the left of 19°46'43" and run in a northeasterly direction along the southeast line of said Lot 25 for a distance of 143.96 feet to an existing iron rebar being the most



20151221000433240 6/14 \$53.00
Shelby Cnty Judge of Probate, AL
12/21/2015 08:40:03 AM FILED/CERT

southerly corner of Lot 26 of said Heatherwood Fourth Sector; thence turn an angle to the left of $0^{\circ}12'22''$ and run in a northeasterly direction along the southeast line of said Lot 26 for a distance of 147.52 feet to an existing iron rebar being the most southerly corner of Lot 27 of said Heatherwood Fourth Sector; thence turn an angle to the right of $1^{\circ}58'19''$ and run in a northeasterly direction along the southeast line of said Lot 27 for a distance of 137.90 feet to an existing iron rebar being the most southerly corner of Lot 28 in said Heatherwood Fourth Sector; thence turn an angle to the right of $3^{\circ}04'04''$ and run in a northeasterly direction along the southeast line of said Lot 28 for a distance of 123.81 feet to an existing iron rebar being the most southerly corner of Lot 29 of said Heatherwood Fourth Sector; thence turn an angle to the right of $3^{\circ}01'49''$ and run in a northeasterly direction along the southeast line of said Lot 29 for a distance of 133.34 feet to an existing iron rebar being the most southerly corner of Lot 30 of said Heatherwood Fourth Sector; thence turn an angle to the right of $8^{\circ}15'35''$ and run in a northeasterly direction for a distance of 45.47 feet to an existing iron rebar being the most westerly corner of Heatherwood Fourth Sector, Second Addition as recorded in the Probate Office of Shelby County, Alabama in map Book 12, pages 79 through 81; thence turn angle to the right of $82^{\circ}48'26''$ and run in a southeasterly direction along the southwest line of Lot 36 in said Heatherwood Fourth Sector Second addition for a distance of 171.61 feet to an existing iron rebar being the most westerly corner of Lot 35 in said Heatherwood Fourth Sector Second Addition; thence turn an angle to the right of $1^{\circ}11'29''$ and run in a southeasterly direction along the southwest line of said Lot 35 for a distance of 170.50 feet to an existing iron rebar being the most westerly corner of Lot 34 of said Heatherwood Fourth Sector Second Addition; thence turn an angle to the left of $8^{\circ}05'04''$ and run in a southeasterly direction along the southwest line of said Lot 34 for a distance of 167.82 feet to an existing iron rebar; thence turn an angle to the left of $21^{\circ}03'21''$ and run in a southeasterly direction along the south line of Lots 34 and 33 in said Heatherwood Fourth Sector Second Addition for a distance of 239.90 feet to an existing iron rebar; thence turn an angle to the left of $86^{\circ}48'21''$ and run in a northeasterly direction for a distance of 33.85 feet to an existing iron rebar; thence turn an angle to the left of $33^{\circ}54'44''$ and run in a northwesterly direction along the northeast line of Lot 33 of said Heatherwood Fourth Sector Second Addition for a distance of 257.43 feet to an existing iron rebar; thence turn an angle to the left of $7^{\circ}58'58''$ and run in a northwesterly direction for a distance of 266.39 feet to an existing iron rebar being the most northerly corner of Lot 32 of said Heatherwood Fourth Sector Second Addition; thence turn an angle to the left of $96^{\circ}06'23''$ and run in a southwesterly direction for a distance of 148.97 feet to an existing iron rebar set by Laurence D. Weygand and being on the northeast right of way line of Heatherwood Place; thence turn an angle to the right of $90^{\circ}39'23''$ and run in a northwesterly direction along the northeast right of way line of Heatherwood Place for a distance of 141.59 feet to an existing iron rebar set by Laurence D. Weygand and being the most southerly corner of Lot 32, Heatherwood Fourth Sector, as recorded in Map Book 9, pages 161 through 163; thence turn an angle to the right of $86^{\circ}47'14''$ and run in a northeasterly direction along the southeast line of said Lot 32 for a distance of 176.18 feet to an existing iron rebar being the most southerly corner of Lot 33, of said Heatherwood Fourth Sector; thence turn an angle to the left of $23^{\circ}38'51''$ and run in a northeasterly direction along the southeast line of said lot 33 for a distance of 126.06 feet to an existing iron rebar; thence turn an angle to the right of $13^{\circ}30'10''$ and run in a northeasterly direction along the southeast line of Lot 34 of said Heatherwood Fourth Sector for a distance of 165.88 feet to an existing iron rebar; thence turn an angle to the left of $9^{\circ}30'30''$ and run in a northeasterly direction along the southeast line of Lot 35, Heatherwood Fourth Sector for a distance of 202.06 feet to an existing iron rebar; thence turn an angle to the left of $19^{\circ}33'33''$ and run in a northeasterly direction along the southeast line of Lot 36 of said Heatherwood Fourth Sector for a distance of 212.22 feet to an existing iron rebar; thence turn an angle to the right of $5^{\circ}12'53''$ and run in a northeasterly direction for a distance of 326.00 feet to an existing iron rebar being the most easterly corner of Lot 38 of said Heatherwood Fourth Sector and also being on the southwest right of way line of Masters Lane and being on a curve, said curve being concave in a northeasterly direction and having a deflection angle of $3^{\circ}01'36''$ and a radius of 240.26 feet; thence turn an angle to the right ($115^{\circ}52'33''$ to the chord of said curve) and run in a southeasterly direction along the arc of said curve for a distance of 25.38 feet to the point of ending of said curve; thence continue in a southeasterly direction along a line tangent to the end of said curve and along the southwest right of way line of Masters Lane for a distance of 145.78 feet to an existing iron rebar being the most northerly corner of Lot 41, Heatherwood Fourth Sector First Addition as recorded in the Probate Office of Shelby County, Alabama, in Map Book 11, page 33; thence turn an angel to the right of $58^{\circ}59'15''$ and run in a southerly direction along the west line of said Lot 41 for a distance of 194.15 feet to an existing iron rebar; thence turn an angle to the right of $8^{\circ}41'42''$ and run in a southwesterly direction along the northwest line of Lot 37 Heatherwood Fourth Sector Second Addition, as recorded in the Probate Office of Shelby County, Alabama, in Map Book 12, pages 79 through 81, for a distance of 219.83 feet to an existing iron rebar; thence turn an angle to the right of $8^{\circ}33'59''$ and run in a southwesterly direction along the west line of sid Lot 37 for a distance of 126.90 feet to an existing iron rebar; thence turn an angle to the right of $11^{\circ}03'59''$ and run in a southwesterly direction for a distance of 292.85 feet to an existing iron rebar being on the northwest line of Lot 30 of said Heatherwood Fourth Sector Second Addition; thence turn an angle to the left of $16^{\circ}47'45''$ and run in a southwesterly direction along the northwest line of said Lot 30 Heatherwood Fourth Sector Second Addition, for a distance of 135.83 feet to an existing iron rebar being the most westerly corner of said Lot 30; thence turn an angle to the left of $90^{\circ}28'18''$ and run in a southeasterly direction along the southwest line of



said Lot 30 for a distance of 254.07 feet to an existing iron rebar being on the west right of way line of Turnberry Road, said west right of way line being on a curve, said curve being concave in an easterly direction and having a deflection angle of 1°51'01" and a radius of 515.39 feet; thence turn an angle to the right (62°50'09" to the chord of said curve) and run in a southerly direction along the arc of said curve and said west right of way for a distance of 33.29 feet to the point of ending of said curve; thence continue in a southerly direction and along the west right of way line of Turnberry Road and along a line tangent to the end of said curve for a distance of 735.85 feet to an existing iron rebar being the northeast corner of Lot 10, Heatherwood Fourth Sector Second Addition; thence turn an angle to the right of 89°59'56" and run in a westerly direction along the north line of said Lot 10 for a distance of 146.93 feet to an existing iron rebar; thence turn an angle to the left of 19°57'47" and run in a southwesterly direction along the north line of said Lot 10 for a distance of 92.55 feet to an existing iron rebar; thence turn an angle to the right of 22°01'08" and run in a westerly direction along the north lines of Lots 9, 8, 7, 6, 5 and 4 in said Heatherwood Fourth Sector Second Addition for a distance of 1068.86 feet to an existing iron rebar being the northwest corner of said Lot 4; thence turn an angle to the right of 128°59'26" and run in an northeasterly direction along the southeast line of Lot 2 in said Heatherwood Fourth Sector Second Addition for a distance of 113.58 feet to an existing iron rebar; thence turn an angle to the left of 105°49'03" and run in a northwesterly direction along the northeast line of said Lot 2 for a distance of 53.41 feet to an existing iron rebar; thence turn an angle to the left of 45°03'31" and run in a southwesterly direction along the north line of said Lot 2 for a distance of 14.16 feet to an existing iron rebar; thence turn an angle to the right of 45°02'29" and run in a northwesterly direction along the northeast line of said Lot 2 for a distance of 120.81 feet to an existing iron rebar being on the southeast right of way line of Heatherwood Drive; thence turn an angle to the right of 114°44'09" and run in a northeasterly direction along the southeast right of way line of said Heatherwood Drive for a distance of 39.20 feet, more or less, to the point of beginning.

The above legal includes the following Subdivision Lot:

Lot 37A, Resurvey of Lots 30 and 37, Heatherwood 4th Sector, 2nd Addition, as recorded in Map Book 15, page 53, in the Probate Office of Shelby County, Alabama

Parcel III

Part of the East 1/2 of Section 9, Township 19 south, Range 2 West, Shelby County, Alabama, being more particularly described as follows:

Beginning at the most northerly corner of Lot 2, Heatherwood, 3rd Sector, as recorded in the Probate Office of Shelby County, Alabama, in Map Book 8, page 29, run in a southwesterly direction along the north line of said Lot 2 for a distance of 111.91 feet to an existing iron rebar being the northwest corner of said Lot 2; thence turn an angle to the left of 50°25'06" and run in a southwesterly direction along the west lines of Lots 2, 3 and 4 of said Heatherwood 3rd Sector for a distance of 442.54 feet to an existing iron rebar; thence turn an angle to the left of 13°08'59" and run in a southerly direction along the west line of Lots 5, 6, 7 and 8 of said Heatherwood 3rd Sector for a distance of 517.89 feet to an existing iron rebar; thence turn an angle to the right of 92°11'29" and run in a westerly direction along the north line of Lots 10, 11 and 12 of said Heatherwood 3rd Sector for a distance of 419.96 feet to an existing iron rebar on the east right of way line of St. Anne's Drive; thence turn an angle to the right of 72°06'36" and run in a northwesterly direction along the east right of way line of St. Anne's Drive for a distance of 31.46 feet to an existing iron rebar being the southwest corner of Lot 13, Heatherwood 3rd Sector; thence turn an angle to the right of 107°48'21" and run in an easterly direction along the south line of said Lot 13 for a distance of 212.35 feet to an existing iron rebar being on the southeast corner of said Lot 13; thence turn an angle to the left of 92°06'38" and run in a northerly direction for a distance of 521.22 feet to an existing iron rebar being the most southerly corner of Lot 17 of said Heatherwood 3rd Sector; thence turn an angle to the right of 22°45'23" and run in a northeasterly direction along the southeast line of Lots 17, 18 and 19 of said Heatherwood 3rd Sector for a distance of 364.46 feet to an existing iron pin; thence turn an angle to the left of 23°04'37" and run in a northerly direction along the east line of Lots 19 and 20 of said Heatherwood 3rd Sector for a distance of 208.82 feet to an existing crimp iron pin; thence turn an angle to the left of 27°50'06" and run in a northwesterly direction along the northeast line of Lots 20 and 21 of said Heatherwood 3rd Sector for a distance of 258.34 feet to an existing crimp iron pin being the most northerly corner of said Lot 21; thence turn angle to the left of 90°05'14" and run in a southwesterly direction along the northwest line of said Lot 21 for a distance of 150.0 feet to an existing iron rebar; thence turn an angle to the right of 90° and run in a northwesterly direction along the northeast right of way line of St. Anne's Drive for a distance of 30.0 feet to an existing iron rebar being the most southerly corner of Lot 11 of Heatherwood 2nd Sector, as recorded in the Probate Office of Shelby County, Alabama, in Map Book 8, page 28; thence turn an angle to the right of 90° and run in a northeasterly direction along the southeast line of said Lot 11 for a distance of 150.22 feet to an existing iron rebar being the most easterly corner of said Lot 11; thence turn an angle to the left of 89°59'19" and run in a northwesterly direction along the northeast line of said Lot 11 for a distance of 191.29 feet to an existing crimp iron pin being the most



20151221000433240 8/14 \$53.00
Shelby Cnty Judge of Probate, AL
12/21/2015 08:40:03 AM FILED/CERT

easterly corner of Lot 10 of said Heatherwood 2nd Sector; thence turn an angle to the left of $26^{\circ}07'33''$ and run in a northwesterly direction along the northeast lines of Lots 10 and 9 of said Heatherwood 2nd Sector for a distance of 221.06 feet to an existing iron rebar; thence turn an angle to the right of $75^{\circ}21'52''$ and run in a northeasterly direction for a distance of 180.47 feet to an existing iron pin; thence turn an angle to the right of $0^{\circ}04'32''$ and run in a northeasterly direction for a distance of 75.01 feet to an existing iron rebar being the most easterly corner of Lot 7-A, A Resurvey of Lot 7, Heatherwood 2nd Sector, as recorded in the Probate Office of Shelby County, Alabama, in Map Book 9, page 4; thence turn an angle to the left of $85^{\circ}56'51''$ and run in a northwesterly direction along the northeast line of said Lot 7-A for a distance of 276.74 feet; thence turn an angle to the left of $48^{\circ}16'45''$ and run in a southwesterly direction along the northwest line of Lot 6, of said Heatherwood 2nd Sector for a distance of 235.01 feet; thence turn an angle to the right of $0^{\circ}0'21''$ and run in a southwesterly direction for a distance of 61.41 feet to an existing crimp iron pin being on the northwest line of Lot 5-A, A Resurvey of Lots 2 and 5, Heatherwood 2nd Sector, as recorded in the Probate Office of Shelby County, Alabama, in Map Book 9, page 32; thence turn an angle to the left of $2^{\circ}39'27''$ and run in a southwesterly direction for a distance of 109.72 feet to an existing iron rebar being the most northerly corner of Lot 2-A of said aforementioned Resurvey of Lots 2 and 5, Heatherwood 2nd Sector; thence turn an angle to the left of $98^{\circ}15'33''$ and run in a southeasterly direction along the northeast line of said Lot 2-A for a distance of 79.47 feet to an existing crimp iron pin being the most easterly corner of said Lot 2-A; thence turn an angle to the right of $59^{\circ}43'21''$ and run in a southwesterly direction along the southeast line of said Lot 2-A for a distance of 145.89 feet to a point on the northeast right of way line of St. Anne's Drive and being on a curve, said curve being concave in a northeasterly direction and having a central angle of $17^{\circ}43'27''$ and radius of 729.39 feet; thence turn an angle to the right ($102^{\circ}06'55''$ to the chord of said curve) and run in a northwesterly direction along the arc of said curve and along the northeast right of way line of St. Anne's Drive for a distance of 225.63 feet to the point of ending of said curve; thence run in a northwesterly direction along the northeast right of way line of said St. Anne's Drive and along a line tangent to the end of said curve for a distance of 21.76 feet to the point of beginning of a new curve, said newest curve being concave in an easterly direction and having a central angle of $77^{\circ}35'20''$ and a radius of 75.0 feet; thence turn an angle to the right and run in a northwesterly, northerly and northeasterly direction along the arc of said curve for a distance of 101.56 feet to a point on the southeast right of way line of Heatherwood Drive; thence run in a northeasterly direction along the southeast right of way line of Heatherwood Drive for a distance of 51.41 feet; thence turn an angle to the left and run in a northwesterly direction for a distance of 10.0 feet to a point on the northeast right of way line of Heatherwood Drive and being on a curve, said curve being concave in a northwesterly direction and having a central angle of $14^{\circ}50'49''$ and a radius of 849.0 feet; thence turn an angle to the right (90° to tangent) and run in a northeasterly direction along the arc of said curve for a distance of 220.0 feet to the southwest corner of Lot 3, Heatherwood 1st Sector, as recorded in the Probate Office of Shelby County, Alabama, in Map Book 8, page 27; thence turn an angle to the right and run in a southeasterly direction along the southwest line of said Lot 3 for a distance of 187.06 feet to the most southerly corner of said Lot 3; thence turn an angle to the left of $103^{\circ}10'48''$ and run in a northerly direction along the east line of said Lot 3 for a distance of 101.51 feet; thence turn an angle to the right of $22^{\circ}35'36''$ and run in a northeasterly direction along the east line of said lot 3 for a distance of 42.23 feet to the most southerly corner of Lot 4 of said Heatherwood 1st Sector; thence turn an angle to the right of $7^{\circ}05'48''$ and run in a northeasterly direction along the southeast line of said Lot 4, Heatherwood 1st Sector for a distance of 145.69 feet to the southeast corner of Lot 5 of said Heatherwood 1st Sector; thence turn an angle to the left of $12^{\circ}35'30''$ and run in a northeasterly direction for a distance of 86.09 feet to a common corner of Lots 5 and 7 of said Heatherwood 1st Sector; thence turn an angle to the right of $83^{\circ}34'08''$ and run in a southeasterly direction for a distance of 83.32 feet; thence turn an angle to the left of $28^{\circ}17'36''$ and run in a northeasterly direction for a distance of 34.18 feet; thence turn an angle to the left of $14^{\circ}29'06''$ and run in a northeasterly direction for a distance of 47.95 feet; thence turn an angle to the left of $23^{\circ}33'12''$ and run in a northeasterly direction for a distance of 44.30 feet; thence turn an angle to the left of $28^{\circ}19'30''$ and run in a northerly direction along the east line of Lot 8, Heatherwood 1st Sector for a distance of 51.07 feet; thence turn an angle to the left of $9^{\circ}8'12''$ and run in a northerly direction for a distance of 111.01 feet to the southeast corner of Lot 9 of said Heatherwood 1st Sector; thence turn an angle to the right of $19^{\circ}53'22''$ and run in a northerly direction along the east line of said Lot 9, Heatherwood 1st Sector for a distance of 59.93 feet; thence turn an angle to the right of $25^{\circ}18'46''$ and run in a northeasterly direction for a distance of 69.94 feet; thence turn an angle to the left of $21^{\circ}34'25''$ and run in a northerly direction for a distance of 23.98 feet to the northeast corner of said Lot 9; thence turn an angle to the left of $10^{\circ}56'09''$ and run in a northerly direction along the east line of Lot 10 of said Heatherwood 1st Sector for a distance of 74.52 feet; thence turn an angle to the left of $35^{\circ}54'39''$ and run in a northwesterly direction along the northeast line of said Lot 10 for a distance of 85.21 feet to an existing crimp iron pin being the southeast corner of Lot 13 of said Heatherwood 1st Sector; thence turn an angle to the right of $16^{\circ}30'02''$ and run in a northerly direction for a distance of 457.83 feet to an existing iron rebar being the northeast corner of Lot 15 of said Heatherwood 1st Sector, thence turn an angle to the left of $67^{\circ}06'04''$ and run in a northwesterly direction along the north line of said Lot 15 for a distance of 135.24 feet to an existing iron rebar being on the southeast right of way line of Heatherwood Drive; thence turn an angle to the right of $90^{\circ}36'20''$ and run in a northeasterly direction along the southeast right of way line of Heatherwood Drive

for a distance of 31.26 feet to an existing iron rebar being the most westerly corner of Lot 16, Heatherwood 1st Sector; thence turn an angle to the right of 90°05'24" and run in a southeasterly direction along the southwest line of Lot 16 for a distance of 139.75 feet to an existing iron rebar; then turn an angle to the left of 64°02'16" and run in a northeasterly direction along the southeast line of said Lot 16 for a distance of 61.07 feet to an existing iron rebar being the southwest corner of Lot 17 of said Heatherwood 1st Sector; thence turn an angle to the right of 76°48'31" and run in a southeasterly direction along the southwest line of said Lot 17 for a distance of 98.66 feet to an existing iron rebar being the most westerly corner of Lot 18 of said Heatherwood 1st Sector; thence turn an angle to the right of 0°42'48" and run in a southeasterly direction along the southwest line of Lot 18 for a distance of 169.98 feet to an existing iron rebar; thence turn an angle to the right of 73°48'52" and run in a southerly direction along the west line of Lot 19-A and 24-A, A Resurvey of Lots 19-30, Heatherwood, 1st Sector, as recorded in the Probate Office of Shelby County, Alabama, in Map Book 9, page 25 for a distance of 253.84 feet to an existing iron rebar; thence turn an angle to the left of 53°46'01" and run in a southeasterly direction along the southwest line of Lots 25-A of a Resurvey of Lots 19-30 Heatherwood 1st Sector for a distance of 179.34 feet; thence turn an angle to the left of 19°23'31" and run in a southeasterly direction for a distance of 86.93 feet; thence turn an angle to the right of 13°04'38" and run in a southeasterly direction for a distance of 60.0 feet to the most southerly corner of Lot 26-A of said aforementioned Resurvey; thence turn an angle to the left of 54°08'04" and run in a northeasterly direction for a distance of 124.96 feet to an existing iron rebar; thence turn an angle to the right of 101°09'53" and run in a southerly direction along the west line of Lot 28-A and Lot 30-A for a distance of 282.38 feet to an existing iron rebar being the northwest corner of Lot 31 of said Heatherwood 1st Sector; thence turn an angle to the left of 26°13' and run in a southeasterly direction for a distance of 167.15 feet to an existing iron rebar being the northwest corner of Lot 32 of said Heatherwood 1st Sector; thence turn an angle to the right of 17°38'45" and run in a southeasterly direction along the west line of said Lot 32 for a distance of 132.50 feet to an existing iron rebar; thence turn an angle to the left of 50°29'31" and run in a southeasterly direction for a distance of 114.54 feet to an existing iron rebar; thence turn an angle to the left of 30°46'16" and run in an easterly direction for a distance of 60.07 feet to a point on the west right of way line of Oakmont Road; thence turn an angle to the right of 89°50'32" and run in a southerly direction along the west right of way line of Oakmont Road for a distance of 245.36 feet to an existing iron rebar set by Laurence D. Weygand and being the northeast corner of Lot 28-A, Resurvey of Lots 27-A and 28, Heatherwood 2nd Sector as recorded in the Probate Office of Shelby County, Alabama, in Map Book 10, page 60; thence turn an angle to the right of 89°58'28" and run in a westerly direction for a distance of 150.0 feet to an existing iron rebar; thence turn an angle to the left of 90°00'17" and run in a southerly direction along the west line of Lot 28-A of aforementioned Resurvey and also the west line of Lots 24-A and 26-A of a Resurvey of Lots 21-27, Heatherwood 2nd Sector as recorded in the Probate Office of Shelby County, Alabama, in Map Book 9, page 26 all for a distance of 724.55 feet to an existing iron rebar being the southwest corner of said Lot 24-A; thence turn an angle to the left of 89°55'58" and run in an easterly direction for a distance of 149.85 feet to an existing iron rebar being the southeast corner of said Lot 24-A and being on the west right of way line of Oakmont Road; thence turn an angle to the right of 89°48' and run in a southerly direction along the west right of way line of Oakmont Road for a distance of 296.76 feet, more or less, to the point of beginning.

The above legal includes the following Subdivision Lots:

Lot 2, according to the Survey of Heatherwood 1st Sector, as recorded in Map Book 8, page 27A & 27B, in the Probate Office of Shelby County, Alabama.

Lot 2A, according to a Resurvey of Lots 2 & 5 Heatherwood 2nd Sector, as recorded in Map Book 9, page 3, in the Probate Office of Shelby County, Alabama.

Parcel IV

Part of the SW 1/4 of Section 9 Township 19 South, Range 2 West, Shelby County, Alabama, being more particularly described as follows:

Beginning at to an existing iron rebar being on the southwest right of way line of Coshatt Trail being the most northerly corner of Lot 1, Phase I Heatherwood 8th Sector as recorded in the Probate Office of Shelby County, Alabama, in Map Book 16, page 118, run in a southwesterly direction along the northwest line of said Lot 6 for a distance of 82.12 feet to an existing iron rebar being the most westerly corner of said Lot 6; thence turn an angle to the left of 96°02'57" and run in a southeasterly direction along the southwest line of said Lot 6 for a distance of 212.26 feet to an existing iron rebar being the most westerly corner of Lot 5 of said Phase I Heatherwood 8th Sector; thence turn an angle to the right of 0°45'51" and run in a southeasterly direction along the southwest line of said Lot 5 for a distance of 162.75 feet to an existing iron rebar; thence turn an angle to the left of 72°59'31" and run in a northeasterly direction along the southeast line of said Lot 5 for a distance of 44.67 feet to an existing iron rebar; thence turn an angle to the left of 16°41'09" and run in a northeasterly direction along the southeast line of said Lot 5 for a distance of 152.15 feet to an existing iron rebar being on the southwest right of way line of



20151221000433240 10/14 \$53.00
Shelby Cnty Judge of Probate, AL
12/21/2015 08:40:03 AM FILED/CERT

Coshatt Trail; thence turn an angle to the right of $93^{\circ}47'$ and run in a southeasterly direction along the southwest right of way line of Coshatt Trail for a distance of 20.07 feet to an existing iron rebar being the most northerly corner of Lot 4, Phase I Heatherwood 8th Sector; thence turn an angle to the right of $86^{\circ}14'12''$ and run in a southwesterly direction along the northwest line of said Lot 4 for a distance of 153.78 feet to an existing iron rebar; thence turn an angle to the right of $16^{\circ}47'45''$ and run in a southwesterly direction for a distance of 40.66 feet to an existing iron rebar being the most westerly corner of said Lot 4; thence turn an angle to the left of $100^{\circ}57'21''$ and run in a southeasterly direction along the southwest line of said Lot 4 for a distance of 127.50 feet to an existing iron rebar being the most westerly corner of Lot 3 of said Phase I Heatherwood 8th Sector; thence turn an angle to the right of $4^{\circ}30'32''$ and run in a southeasterly direction along the southwest line of said Lot 3 for a distance of 143.04 feet to an existing iron rebar being the most westerly corner of Lot 2 of said Phase I Heatherwood 8th Sector; thence turn an angle to the left of $0^{\circ}0'11''$ and run in a southeasterly direction along the southwest line of Lots 2 and 1 of said subdivision for a distance of 385.02 feet to an existing iron rebar set by Laurence D. Weygand; thence turn an angle to the right of $68^{\circ}46'35''$ and run in a southwesterly direction along the northwest line of Lot 23 Heatherwood 4th Sector as recorded in the Probate Office of Shelby County, Alabama, in Map Book 9, page 163 for a distance of 80.97 feet to an existing iron rebar, thence turn an angle to the left of $81^{\circ}38'47''$ and run in a southeasterly direction along the southwest line of said Lot 23 for a distance of 249.85 feet to an existing iron rebar being the most southerly corner of said Lot 23 and being on the northwest right of way line of Heatherwood Drive, said right of way line being in a curve, said curve being concave in a northwesterly direction and having a central angle of $4^{\circ}57'41''$ and a radius of 1500.03 feet; thence turn an angle to the right ($89^{\circ}54'56''$ to the chord of said curve) and run in a southwesterly direction along the arc of said curve and along said Northwest right of way line for a distance of 129.89 feet; thence run in a southwesterly direction along the northwest right of way line of said Heatherwood Drive and along a line tangent to the end of said curve for a distance of 45.92 feet to the point of beginning of a new curve, said new curve being concave in a southeasterly direction and having a central angle of $1^{\circ}38'53''$ and a radius of 5468.14 feet; thence turn an angle to the left and run in a southwesterly direction along the arc of said curve and along the northwest right of way line of said Heatherwood Drive for a distance of 157.28 feet to an existing iron rebar set by Laurence D. Weygand; thence turn an angle to the right of ($99^{\circ}26'29''$ from the chord of last mentioned curve) and run in a northwesterly direction for a distance of 1396.75 feet to an existing iron rebar being the southwest corner of Lot 7, Phase I Heatherwood 8th Sector; thence turn an angle to the right of $86^{\circ}12'43''$ and run in a northeasterly direction along the southeast line of said Lot 7 for a distance of 362.88 feet to the most easterly corner of said Lot 7 and being on the southwest right of way line of Coshatt Trail; thence turn an angle to the right and run in a southeasterly direction along the curved southwest right of way line of Coshatt Trail for a distance of 42.75 feet, more or less, to the point of beginning.

PARCEL V:

Part of Section 9, Township 19 South, Range 2 West, Shelby County, Alabama, being more particularly described as follows:

Beginning at the northwest corner of Lot 9, Heatherwood Sector 1- 1st Addition as recorded in the Probate Office of Shelby County, Alabama, in Map Book 9, page 66, run in a southerly direction along the west line of said Lot 9 and Lot 8 of said subdivision for a distance of 310.39 feet to an existing crimp iron pin; thence turn an angle to the left of $10^{\circ}13'3''$ and run in a southeasterly direction along the west line of Lot 7 of said Heatherwood Sector 1- 1st Addition for a distance of 142.20 feet to an existing crimp iron pin being the northwest corner of Lot 6 of said Heatherwood Sector 1- 1st Addition; thence turn an angle to the right of $2^{\circ}38'22''$ and run in a southeasterly direction along the west line of said Lot 6 for a distance of 151.33 feet to an existing crimp iron pin; thence turn an angle to the right of $7^{\circ}32'16''$ and run in a southerly direction along the west line of Lot 5 of said Heatherwood Sector 1- 1st Addition for a distance of 139.95 feet to an existing crimp iron pin; thence turn an angle to the right of $4^{\circ}01'03''$ and run in a southerly direction along the west line of Lot 4 of Heatherwood Sector 1- 1st Addition for a distance of 140.47 feet to an existing crimp iron pin; thence turn an angle to the left of $10^{\circ}59'39''$ and run in a southerly direction along the west line of Lot 3 of said Heatherwood Sector 1- 1st Addition for a distance of 161.56 feet to an existing iron rebar being the southwest corner of said Lot 3; thence turn an angle to the left of $83^{\circ}15'31''$ and run in an easterly direction along the south line of Lot 3 for a distance of 150.68 feet to an existing iron rebar being the southeast corner of said Lot 3 and being on the west right of way line of Heatherwood Drive; thence turn an angle to the right of 90° and run in a southerly direction along the west right of way line of Heatherwood Drive for a distance of 224.76 feet to the point of beginning of a curve, said curve being concave in a westerly direction and having a central angle of $10^{\circ}53'34''$ and a radius of 789.0 feet; thence turn an angle to the right and run in a southerly direction along the arc of said curve and along the west right of way line of Heatherwood Drive for a distance of 150.00 feet to an existing iron rebar set by Laurence D. Weygand; thence turn an angle to the right ($92^{\circ}00'54''$ from the chord of last mentioned curve) and run in a westerly direction for a distance of 360.96 feet to an existing iron rebar set by Laurence D. Weygand; thence turn an angle to the right of



20151221000433240 11/14 \$53.00
Shelby Cnty Judge of Probate, AL
12/21/2015 08:40:03 AM FILED/CERT

26°03'49" and run in a northwesterly direction for a distance of 315.0 feet; thence turn an angle to the right of 33°30' and run in a northwesterly direction 314.58 feet to an existing iron rebar set by Laurence D. Weygand; thence turn an angle left 9°16'48" and run in a northwesterly direction for a distance of 186.81 feet to an existing iron rebar set by Laurence D. Weygand; thence turn an angle to the right of 29°44'02" and run in a northerly direction for a distance of 96.10 feet to an existing iron rebar set by Laurence D. Weygand; thence turn an angle to the left of 27°46'45" and run in a northwesterly direction for a distance of 322.64 feet to an existing iron rebar set by Laurence D. Weygand; thence turn an angle to the right of 45°43'33" and run in a northeasterly direction for a distance of 90.21 feet to an existing iron rebar set by Laurence D. Weygand; thence turn an angle to the right of 36°07'14" and run in a northeasterly direction for a distance of 190.10 feet to an existing iron rebar set by Laurence D. Weygand; thence turn an angle to the right of 66°14'05" and run in a southeasterly direction for a distance of 270.88 feet to an existing iron rebar set by Laurence D. Weygand; thence turn an angle to the right of 25°40'55" and run in a southeasterly direction for a distance of 309.56 feet to an existing iron rebar set by Laurence D. Weygand; thence turn an angle to the left of 96°11'29" and run in a northeasterly direction for a distance of 73.30 feet to an existing iron rebar set by Laurence D. Weygand; thence turn an angle to the left of 43°38'43" and run in a northerly direction for a distance of 84.00 feet to an existing iron rebar set by Laurence D. Weygand; thence turn an angle to the right of 22°36'18" and run in a northeasterly direction for a distance of 142.14 feet to an existing iron rebar set by Laurence D. Weygand; thence turn an angle to the left of 33°47'53" and run in a northwesterly direction for a distance of 196.77 feet to an existing iron rebar set by Laurence D. Weygand; thence turn an angle to the right of 25°06'36" and run in a northeasterly direction for a distance of 83.25 feet to an existing iron rebar set by Laurence D. Weygand; thence turn an angle to the right of 66°30'45" and run in an easterly direction for a distance of 104.18 feet, more or less, to the point of beginning.

PARCEL VI:

Part of Section 9, Township 19 South, Range 2 West, Shelby County, Alabama being more particularly described as follows:

Beginning at an existing iron rebar being the most easterly corner of Lot 2, Heatherwood 4th Sector, as recorded in the Probate Office of Shelby County, Alabama, in Map Book 9, page 161, run in a northwesterly direction along the northeast line of said Lot 2 for a distance of 109.98 feet to an existing iron rebar; thence turn an angle to the left of 76°28'56" and run in a southwesterly direction along the northwest line of said Lot 2 for a distance of 151.02 feet to an existing iron rebar; thence turn an angle to the right of 2°29'23" and run in a southwesterly direction along the northwest line of said Lot 2 for a distance of 88.44 feet to an existing iron rebar being the most westerly corner of said Lot 2; thence turn an angle to the right of 26°57'57" and run in a westerly direction along the north line of Lot 2-A of Heatherwood 4th Sector, for a distance of 193.10 feet to an existing nail in concrete; thence turn an angle to the left of 40°19'02" and run in a southwesterly direction along the northwest line of said Lot 2-A for a distance of 20.68 feet to an existing nail in a stump being the most northerly corner of Lot 3 of said Heatherwood 4th Sector; thence turn an angle to the left of 0°15'40" and run in a southwesterly direction along the northeast line of Lot 3 of said Heatherwood 4th Sector, for a distance of 126.66 feet to an existing iron rebar; thence turn an angle to the left of 49°38'18" and run in a southerly direction for a distance of 88.24 feet to an existing iron rebar; thence turn an angle to the right of 59°35'58" and run in a southwesterly direction along the northwest line of said Lot 6, Heatherwood 4th Sector, for a distance of 96.16 feet to an existing nail in a rock; thence turn an angle to the right of 13°59'09" and run in a southwesterly direction along the northwest line of said Lot 6 for a distance of 80.86 feet to an existing iron rebar being the northeast corner of Lot 7 of said Heatherwood 4th Sector; thence turn an angle to the right of 2°47'55" and run in a southwesterly direction along the north line of said lot 7 for a distance of 147.58 feet to an existing iron rebar; thence turn an angle to the right of 18°19'35" and run in a westerly direction along the north line of said Lot 7 for a distance of 178.66 feet to an existing iron rebar; thence turn an angle to the left of 120°51'45" and run in a southeasterly direction along the west line of said Lot 7 more or less 140.40 feet to an existing iron rebar; thence turn an angle to the right of 8°49'33" and run in a southerly direction along the west line of said Lot 7 for a distance of 109.99 feet to an existing iron rebar being the most northerly corner of Lot 9 of said Heatherwood 4th Sector; thence turn an angle to the left of 0°04'17" and run in a southeasterly direction along the west line of said Lot 9 for a distance of 154.55 feet to an existing iron rebar; thence turn an angle to the left of 20°39'33" and run in a southeasterly direction along the west line of said Lot 9 for a distance of 78.74 feet to an existing iron rebar; thence turn an angle to the right of 10°02'28" and run in a southeasterly direction along the west line of said lot 9 for a distance of 27.97 feet to an existing iron rebar being the most westerly corner of Lot 10 of said subdivision; thence turn an angle to the left of 0°06'33" and run in a southeasterly direction along the west line of said Lot 10 for a distance of 120.92 feet to an existing iron rebar; thence turn an angle to the right of 21°42'51" and run in a southerly direction along the west line of said Lot 10 for a distance of 101.37 feet to an existing iron rebar being the northwest corner of Lot 12 of said subdivision; thence turn an angle to the right of 0°03'57" and run in a southerly direction along the west line of said Lot 12 for a distance of 51.04 feet to an existing iron rebar; thence turn an angle to the right of 6°27'27" and run in a southerly



20151221000433240 12/14 \$53.00
Shelby Cnty Judge of Probate, AL
12/21/2015 08:40:03 AM FILED/CERT

direction along the west line of said Lot 12 for a distance of 120.98 feet to an existing iron rebar being the northwest corner of Lot 13 of said Heatherwood 4th Sector; thence turn an angle to the left of $0^{\circ}07'32''$ and run in a southerly direction along the west line of said Lot 13 for a distance of 115.13 feet to an existing iron rebar being the most northerly corner of Lot 14 of said Heatherwood 4th Sector; thence turn an angle to the right of $25^{\circ}12'38''$ and run in a southwesterly direction along the northwest line of Lot 14 of said subdivision for a distance of 119.05 feet to an existing iron rebar being the most northerly corner of Lot 15 of said Heatherwood 4th Sector; thence turn an angle to the right of $9^{\circ}12'34''$ and run in a southwesterly direction along the northwest line of said Lot 15 for a distance of 113.60 feet to an existing iron rebar being the most northerly corner of Lot 16 of said Heatherwood 4th Sector; thence turn an angle to the right of $1^{\circ}22'08''$ and run in a southwesterly direction along the northwest line of said Lot 16 for a distance of 178.79 feet to an existing iron rebar being the most northerly corner of Lot 17 of said Heatherwood 4th Sector; thence turn an angle to the right of $2^{\circ}38'21''$ and run in a southwesterly direction along the northwest line of said Lot 17 for a distance of 136.62 feet to an existing iron rebar being the most northerly corner of Lot 18 of said Heatherwood 4th Sector; thence turn an angle to the right of $5^{\circ}34'01''$ and run in a southwesterly direction along the northwest line of said Lot 18 for a distance of 145.65 feet to an existing iron rebar set by Laurence D. Weygand; thence turn an angle to the right of $0^{\circ}40'06''$ and run in a southwesterly direction along the northwest line of said Lot 18 for a distance of 50.68 feet to an existing iron rebar set by Laurence D. Weygand being the most westerly corner of said Lot 18 and being on the northeast right of way of Spyglass Lane and being on a curve, said curve being concave in a southwesterly direction and having a central angle of $0^{\circ}15'39''$ and a radius of 700.0 feet; thence turn an angle to the right (90° to tangent) and run in a northwesterly direction along the curved northeast right of way line of said Spyglass Lane for a distance of 3.19 feet to a point of a compound curve, said newest curve being concave in a southwesterly direction and having a central angle of $14^{\circ}32'16''$ and a radius of 260.0 feet; thence turn an angle to the left and run in a northwesterly direction along the curved northeast right of way line of Spyglass Lane for a distance of 65.97 feet to the point of ending of said curve; thence run in a northwesterly direction along a line tangent to the end of said curve and along the northeast right of way line of Spyglass Lane for a distance of 79.01 feet to an existing iron rebar being the most southerly corner of Lot 20, Heatherwood 9th Sector, Phase I, as recorded in the Probate Office of Shelby County, Alabama, in Map Book 18, page 130; thence turn an angle to the right of $101^{\circ}56'14''$ and run in a northeasterly direction along the southeast line of said Lot 20 for a distance of 136.96 feet to an existing iron rebar; thence turn an angle to the left of $34^{\circ}02'23''$ and run in a northeasterly direction along the east line of said Lot 20 for a distance of 71.44 feet to an existing iron rebar being the most southerly corner of Lot 18 of said Heatherwood 9th Sector, Phase I; thence turn an angle to the right of $21^{\circ}53'20''$ and run in a northeasterly direction along the southeast line of said Lot 18 for a distance of 149.87 feet to an existing iron rebar being the most southerly corner of Lot 17 of said Heatherwood 9th Sector, Phase I; thence turn an angle to the right of $16^{\circ}50'49''$ and run in a northeasterly direction along the southeast line of Lots 17 and 16 of said Heatherwood 9th Sector, Phase I for a distance of 269.33 feet to an existing iron rebar; thence turn an angle to the left of $63^{\circ}13'06''$ and run in a northwesterly direction along the northeast line of said Lot 16 for a distance of 148.97 feet to an existing iron rebar; thence turn an angle to the left of $3^{\circ}31'12''$ and run in a northwesterly direction along the northeast line of Lot 15, Heatherwood 9th Sector, Phase 2 as recorded in the Probate Office of Shelby County, Alabama, in Map Book 19, page 17 for a distance of 131.07 feet to an existing iron rebar being the most easterly corner of Lot 14 of said Heatherwood 9th Sector, Phase 2; thence turn an angle to the left of $6^{\circ}27'22''$ and run in a northwesterly direction along the northeast line of said Lot 14 for a distance of 161.19 feet to an existing iron rebar; thence turn an angle to the right of $29^{\circ}52'36''$ and run in a northerly direction along the east line of Lot 13-A, Heatherwood 9th Sector, Phase 2 for a distance of 153.17 feet to an existing iron rebar; thence turn an angle to the left of $25^{\circ}20'59''$ and run in a northwesterly direction along the northeast line of Lot 13-B of said Heatherwood 9th Sector, Phase 2 for a distance of 130.16 feet to an existing iron rebar being the most northerly corner of said Lot 13-B; thence turn an angle to the right of $8^{\circ}24'38''$ and run in a northeasterly direction for a distance of 422.47 feet to an existing iron rebar set by Laurence D. Weygand; thence turn an angle to the right of $75^{\circ}37'18''$ and run in a northeasterly direction for a distance of 83.08 feet to an existing iron rebar set by Laurence D. Weygand; thence turn an angle to the right of $19^{\circ}40'35''$ and run in a northeasterly direction for a distance of 108.88 feet to an existing iron rebar set by Laurence D. Weygand; thence turn an angle to the left of $27^{\circ}11'13''$ and run in a northeasterly direction for a distance of 406.37 feet to an existing iron rebar set by Laurence D. Weygand; thence turn an angle to the left of $3^{\circ}26'35''$ and run in a northeasterly direction for a distance of 148.79 feet to an existing iron rebar set by Laurence D. Weygand; thence turn an angle to the right of $30^{\circ}42'39''$ and run in a northeasterly direction for a distance of 383.88 feet to an existing iron rebar set by Laurence D. Weygand; thence turn an angle to the left of $13^{\circ}53'24''$ and run in a northeasterly direction for a distance of 421.24 feet to an existing iron rebar set by Laurence D. Weygand; thence turn an angle to the right of $68^{\circ}11'19''$ and run in a southeasterly direction for a distance of 156.69 feet, more or less, to the point of beginning.

LESS AND EXCEPT any part of the above described legal description lying within Lot 2-B, according to a Resurvey of Lot 2 of Heatherwood, 4th Sector and also part of the SW 1/4 of NE 1/4 of Section 9, Township 19 South, Range 2 West, as recorded in Map Book 10, page 82, in the Probate Office of Shelby County, Alabama.



20151221000433240 13/14 \$53.00

Shelby Cnty Judge of Probate, AL

12/21/2015 08:40:03 AM FILED/CERT

Parcel VII

Part of the SW 1/4 of Section 9, Township 19 South, Range 2 West, Shelby County, Alabama, being more particularly described as follows:

Beginning at an existing iron rebar being on the northwest right of way line of Heatherwood Drive and being the most easterly corner of Lot 22, Heatherwood 4th Sector as recorded in the Probate Office of Shelby County, Alabama, in Map Book 9, pages 161-163; run in a northwesterly direction along the east line of said Lot 22 for a distance of 91.60 feet to an existing iron rebar; thence turn an angle to the right of $12^{\circ}22'10''$ and run in a northwesterly direction along the northeast line of said Lot 22 for a distance of 155.94 feet to an existing iron rebar; thence turn an angle to the left of $107^{\circ}45'34''$ and run in a southwesterly direction along the northwest line of said Lot 22 for a distance of 20.22 feet to an existing iron rebar being the most easterly corner of Lot 25, Phase I Heatherwood 8th Sector, as recorded in the Probate Office of Shelby County, Alabama, in Map Book 16, page 118; thence turn an angle to the right of $97^{\circ}33'06''$ and run in a northwesterly direction along the east line of said Lot 25 for a distance of 54.94 feet to an existing iron rebar; thence turn an angle to the right of $0^{\circ}18'20''$ and run in a northwesterly direction along the northeast line of said Lot 25, for a distance of 80.50 feet to an existing iron rebar being the southeast corner of Lot 24 of said Phase I, Heatherwood 8th Sector; thence turn an angle to the right of $14^{\circ}22'04''$ and run in a northwesterly direction along the east line of said Lot 24 for a distance of 151.18 feet to an existing iron rebar; thence turn an angle to the left of $1^{\circ}26'21''$ and run in a northwesterly direction along the east line of Lot 23 of said Heatherwood 8th Sector, Phase I for a distance of 218.0 feet to an existing iron rebar being the most easterly corner of Lot 22 of said Phase I, Heatherwood 8th Sector; thence turn an angle to the left of $17^{\circ}14'27''$ and run in a northwesterly direction along the northeast line of said Lot 22 for a distance of 120.51 feet to an existing iron rebar being on a curve, said curve being concave in a northwesterly direction and having a central angle of $22^{\circ}56'39''$ and a radius of 441.75 feet; thence turn an angle to the left ($101^{\circ}11'25''$ to the chord of said curve) and run in a southwesterly direction along the arc of said curve for a distance of 176.90 feet to an existing iron rebar being the northwest corner of said Lot 22 and being on the east right of way line of Coshatt Trail; thence turn an angle to the right ($109^{\circ}20'33''$ to the chord) and run in a northwesterly direction along the northeast right of way line of Coshatt Trail for a distance of 20.15 feet to an existing iron rebar being the most southerly corner of Lot 21, Phase I Heatherwood 8th Sector, and being on a curve, said curve being concave in a northwesterly direction and having a central angle of $16^{\circ}03'39''$ and a radius of 421.75 feet; thence turn an angle to the right ($73^{\circ}41'30''$ from last mentioned chord to the chord of this curve) and run in a northeasterly direction along the arc of said curve for a distance of 118.22 feet to an existing iron rebar being the most easterly corner of said Lot 21; thence from the last mentioned chord line turn an angle to the left of $31^{\circ}12'25''$ and run in a northeasterly direction for a distance of 131.52 feet to an existing iron rebar; thence turn an angle to the left of $39^{\circ}18'38''$ and run in a northwesterly direction for a distance of 212.28 feet to an existing iron rebar set by Laurence D. Weygand; thence turn an angle to the right of $22^{\circ}26'06''$ and run in a northerly direction for a distance of 148.52 feet to an existing iron rebar set by Laurence D. Weygand; thence turn an angle to the right of $65^{\circ}28'50''$ and run in a northeasterly direction for a distance of 95.14 feet to an existing iron rebar set by Laurence D. Weygand; thence turn an angle to the right of $24^{\circ}30'52''$ and run in a easterly direction for a distance of 75.56 feet to an existing iron rebar set by Laurence D. Weygand; thence turn an angle to the left of $28^{\circ}25'34''$ and run in a northeasterly direction for a distance of 62.21 feet to an existing iron rebar being the most westerly corner of Lot 6-B, Heatherwood 9th Sector, Phase II, as recorded in the Probate Office of Shelby County, Alabama, in Map Book 19, page 158; thence turn an angle to the right of $87^{\circ}22'16''$ and run in a southeasterly direction along the southwest line of said Lot 6-B for a distance of 127.83 feet to an existing iron rebar and being the northwest corner of Lot 6-A of said Heatherwood 9th Sector, Phase II; thence turn an angle to the right of $18^{\circ}28'18''$ and run in a southeasterly direction along the west line of Lot 6-A for a distance of 135.39 feet to an existing iron rebar being the most westerly corner of Lot 5, Heatherwood 9th Sector, Phase I, as recorded in the Probate Office of Shelby County, Alabama, in Map Book 18, page 130; thence turn an angle to the left of $14^{\circ}57'48''$ and run in a southeasterly direction along the southwest line of said Lot 5 for a distance of 149.15 feet to an existing iron rebar being the most westerly corner of Lot 4 of said Heatherwood 9th Sector, Phase I; thence turn an angle to the left of $7^{\circ}48'37''$ and run in a southeasterly direction along the southwest line of said Lot 4 for a distance of 94.11 feet to an existing iron rebar being the northwest corner of Lot 3 of said Heatherwood 9th Sector, Phase I; thence turn an angle to the right of $24^{\circ}02'21''$ and run in a southeasterly direction along the west line of said Lot 3 for a distance of 120.70 feet to an existing iron rebar being the northwest corner of Lot 2 of said Heatherwood 9th Sector, Phase I; thence turn an angle to the right of $10^{\circ}24'06''$ and run in a southerly direction along the west line of said Lot 2 for a distance of 186.45 feet to the southwest corner of said Lot 2; thence turn an angle to the right of $12^{\circ}31'$ and run in a southwesterly direction along the west line of Lot 1 of said Heatherwood 9th Sector, Phase I for a distance of 100.62 feet to an existing iron rebar; thence turn an angle to the left of $28^{\circ}39'49''$ and run in a southeasterly direction for a distance of 83.68 feet to an existing iron rebar; thence turn an angle to the left of $50^{\circ}38'39''$ and run in a southeasterly direction along the southwest line of said Lot 1 for a distance of 47.65 feet to an existing iron rebar; thence turn an angle to the left of $54^{\circ}30'08''$ and run in a

northeasterly direction along the southeast line of said Lot 1 for a distance of 274.72 feet to an existing iron rebar being the most easterly corner of said Lot 1 and being on the southwest right of way line of Spyglass Lane and being on a curve, said curve being concave in a southwesterly direction and having a central angle of 14°32'16" and a radius of 200.0 feet; thence turn an angle to the right (85°41'01" to the chord of said curve) and run in a southeasterly direction along the curved southwest right of way line of Spyglass Lane for a distance of 50.75 feet to a point of compound curve, said newest curve being concave in a southwesterly direction and having a central angle of 0°36'40" and radius of 640.0 feet; thence turn an angle to the right and run in a southeasterly direction along the arc of said curve and along the southwest right of way line of Spyglass Lane for a distance of 6.83 feet to an existing iron rebar set by Laurence D. Weygand and being the most northerly corner of Lot 20-A, A Resubdivision of Lots 18, 19 and 20 Heatherwood 4th Sector, as recorded in the Probate Office of Shelby County, Alabama, in Map Book 26, page 11; thence turn an angle to the right (86°52'23" from the chord of the last mentioned curve) and run in a southwesterly direction along the northwest line of said Lot 20-A for a distance of 41.31 feet to an existing iron rebar; thence turn an angle to the right of 1°40'05" and run in a southwesterly direction along the northwest line of said Lot 20-A for a distance of 201.19 feet to an existing iron rebar being the most northerly corner of Lot 21 of said Heatherwood 4th Sector (Map Book 9, page 161-163); thence turn an angle to the right of 2°24'45" and run in a southwesterly direction for a distance of 152.68 feet to an existing iron rebar being the northwest corner of said Lot 21; thence turn an angle to the left of 67°18'55" and run in a southerly direction along the west line of said Lot 21 for a distance of 142.98 feet to an existing iron rebar; then turn an angle to the left of 34°51'29" and run in a southeasterly direction along the west line of said Lot 21 for a distance of 69.73 feet to an existing iron rebar being on the northwest right of way line of Heatherwood Drive and being on a curve, said curve being concave in a northwesterly direction and having a central angle of 3°20'26" and a radius of 1287.73 feet; thence turn an angle to the right (83°36'56" to the chord of said curve) and run in a southwesterly direction along the arc of said curve and along the northwest right of way line of Heatherwood Drive for a distance of 75.08 feet, more or less, to the point of beginning.

Parcel VIII

TOGETHER WITH a part of Lot 71-A of a Resurvey of Lot 71, Heatherwood 4th Sector, 1st Addition as recorded in Map Book 24, on page 31 in the Probate Office of Shelby County, Alabama, being more particularly described as follows:

Commence at the Southwest corner of said Lot 71-A; thence run in a Northeasterly direction along the Northwest line of said Lot 71-A for a distance of 93.67 feet to the point of beginning; thence continue along last stated course for a distance of 37.18 feet to an iron pin found; thence turn an angle to the right of 35°12'49" and run in a Northeasterly direction along the Northwest line of said Lot 71-A for a distance of 37.18 feet to a point; thence turn an angle to the right of 162°23'36" and run in a Southwesterly direction for a distance of 70.88 feet to the point of beginning.


20151221000433240 14/14 \$53.00
Shelby Cnty Judge of Probate, AL
12/21/2015 08:40:03 AM FILED/CERT